
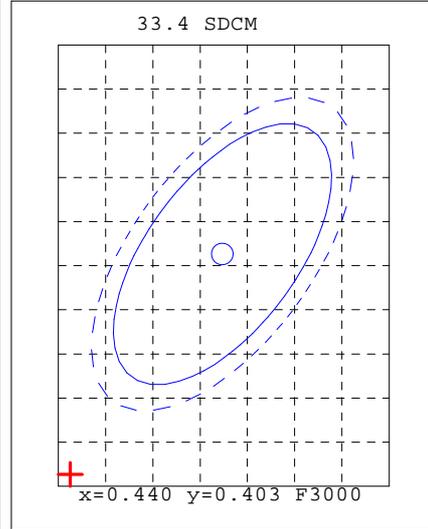


Light Source Test Report

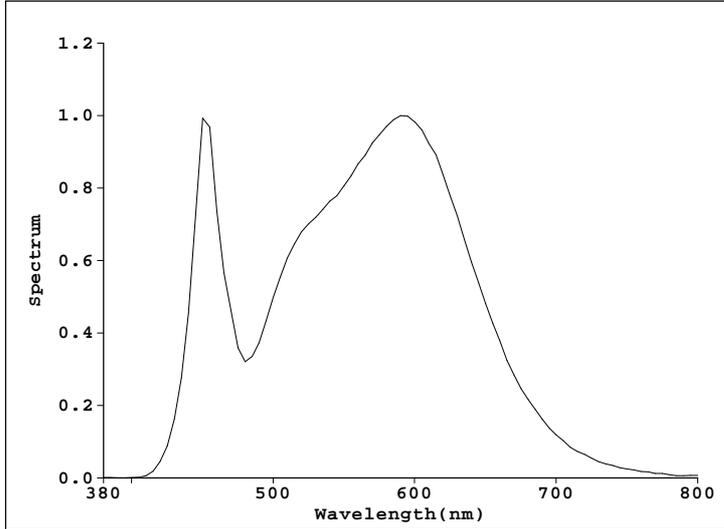

Color Parameters:

Chromaticity Coordinate: $x=0.3774(dx=0.0030)$ $y=0.3802(dy=0.0065)$
 Chromaticity Coordinate: $u'=0.2218$ $v'=0.5026(duv=2.49e-03)$
 Tc=4107K Dominant WL:Ld=577.3nm Purity=27.4% Centroid WL:567.0nm
 Ratio:R=19.2% G=77.4% B=3.4% Peak WL:Lp=590.0nm HWL:148.1nm
 Render Index:Ra=82.3
 R1 =80 R2 =89 R3 =96 R4 =80 R5 =80 R6 =85 R7 =86
 R8 =62 R9 =2 R10=74 R11=79 R12=61 R13=82 R14=98 R15=73

Photo Parameters:

Flux: 706.50 lm Fe: 2.1195 W Efficacy:126.1 lm/W
 WHITE:ANSI_4000K

Electrical Parameters:

Luminaire: U=227.71V I=0.04818A P=5.603W PF=0.5107

Instrument Status:

Scan Range:380.0nm-800.0nm Interval:5.0nm[0] $I_p=27001(G=5,D=50)$
 REF=24095(R=3) $\%=-0.054\%$ PMT: 24.7 centigrade [150.0]

Product Type:LLK6W55MME27SW-4
 Number:
 Temperature:25.3 deg
 Test Operator:
 Software:V3.00.137

Manufacturer:
 Test Department:
 Humidity:65.0%
 Test Date:2021-04-17 21:21:41
 Instrument:PMS-80_V1 (SN:G107113CJ6321130)