
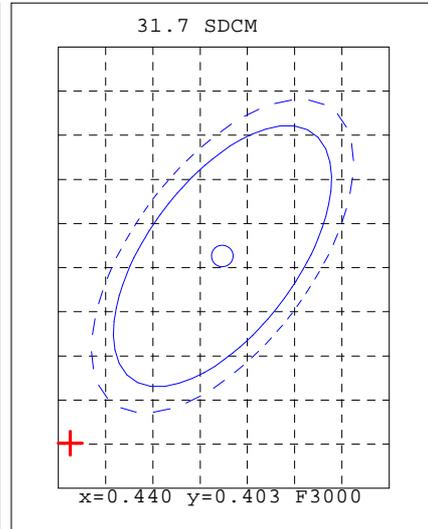


Light Source Test Report

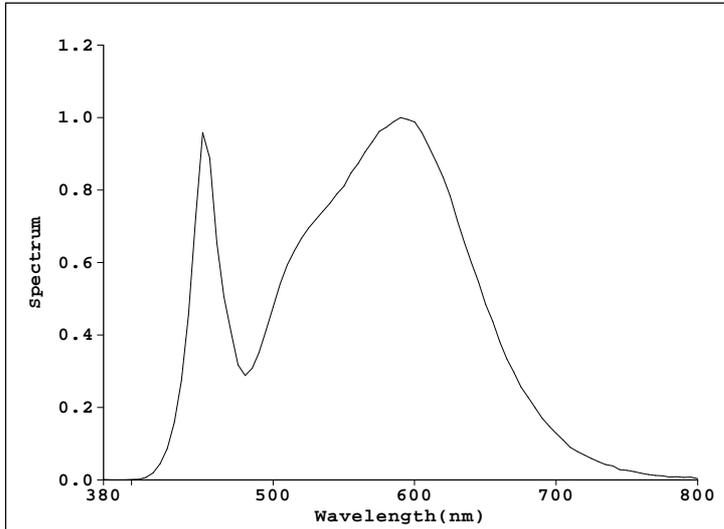

Color Parameters:

Chromaticity Coordinate: $x=0.3821(dx=0.0002)$ $y=0.3860(dy=0.0008)$
 Chromaticity Coordinate: $u'=0.2225$ $v'=0.5058(duv=3.76e-03)$
 Tc=4021K Dominant WL:Ld=577.1nm Purity=30.5% Centroid WL:569.0nm
 Ratio:R=19.2% G=77.6% B=3.2% Peak WL:Lp=590.0nm HWL:147.0nm
 Render Index:Ra=81.0
 R1 =78 R2 =87 R3 =95 R4 =79 R5 =78 R6 =83 R7 =86
 R8 =61 R9 =-2 R10=71 R11=78 R12=59 R13=80 R14=97 R15=71

Photo Parameters:

Flux: 527.93 lm Fe: 1.5698 W Efficacy:81.89 lm/W
 WHITE:ANSI_4000K

Electrical Parameters:

Luminaire: U=231.44V I=0.02894A P=6.447W PF=0.9627

Instrument Status:

Scan Range:380.0nm-800.0nm Interval:5.0nm[0] $I_p=18951(G=5,D=53)$
 REF=18340(R=3) $\%=-0.513\%$ PMT: 28.4 centigrade [150.0]

Product Type:LLK7WD45MME14SW-C-1	Manufacturer:
Number:	Test Department:
Temperature:25.3 deg	Humidity:65.0%
Test Operator:	Test Date:2021-09-23 23:14:23
Software:V3.00.137	Instrument:PMS-80_V1 (SN:G107113CJ6321130)