


Spectrum Test Report

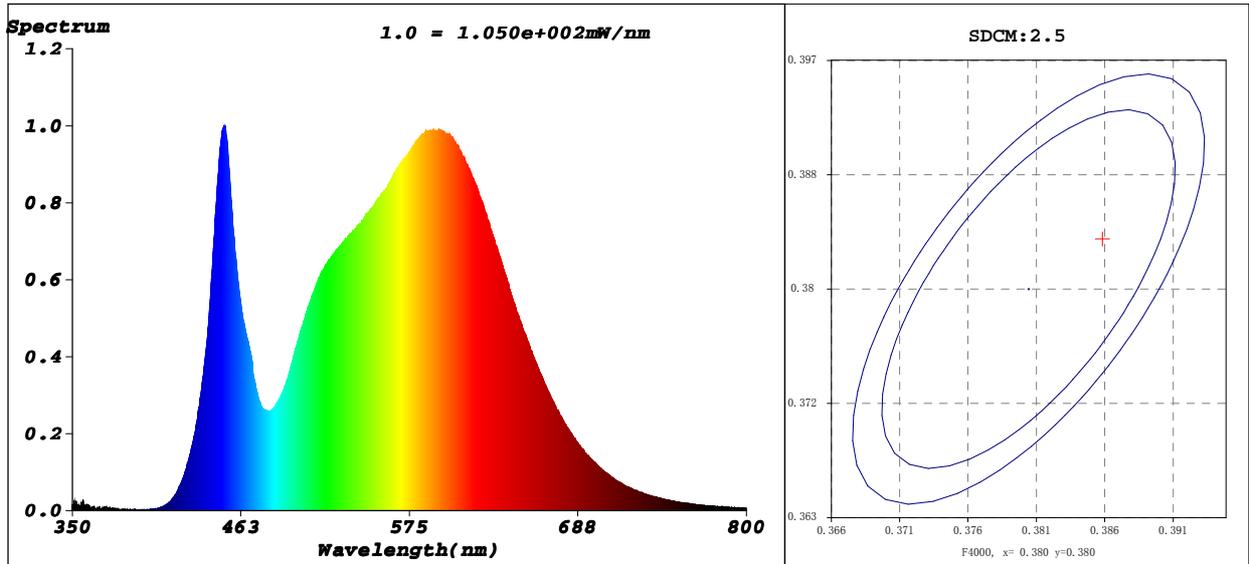

Colorimetric Parameters

Chromaticity Coordinate: $x=0.3854$ $y=0.3837$ $u'=0.2256$ $v'=0.5053$
 CCT=3920K(Duv=0.0018) Dominant WL:Ld =578.5nm Purity=30.8%
 Peak WL:Lp=451.4nm FWHM=22.7nm
 Render Index:Ra=81.1 Render Index:AvgR =73.8
 R1 =79 R2 =87 R3 =94 R4 =80 R5 =79 R6 =83 R7 =85
 R8 =61 R9 =0 R10=70 R11=78 R12=59 R13=81 R14=97 R15=72

Photometric & Radiometric Parameters

Flux=5914 lm Eff.:97.92 lm/W Fe=17.65 W

Electrical parameters

V=230.2 V I=0.4568 A P=60.40 W PF=0.5744 Kdisp(IEC) = 0 F=49.99 Hz
 功率因数 Kdisp(IEC)=0 频率=49.99 Hz

LEVEL:OUT WHITE:ANSI_4000K

Status: Integral T = 56 ms Ip = 56445 (86%)

Model:LLPBL30X120CM60W4000K-1 Test Mode: Accuracy Test: Sensitivity = High; TeCool: ON
 Test By:DAMIN Number:LLPBL30X120CM60W4000K-1
 Temperature:25.3Deg Date:2023-07-25 16:52:57
 Manufacturer: Humidity:65.0%
 Assessor:damin Remarks:---