


Spectrum Test Report

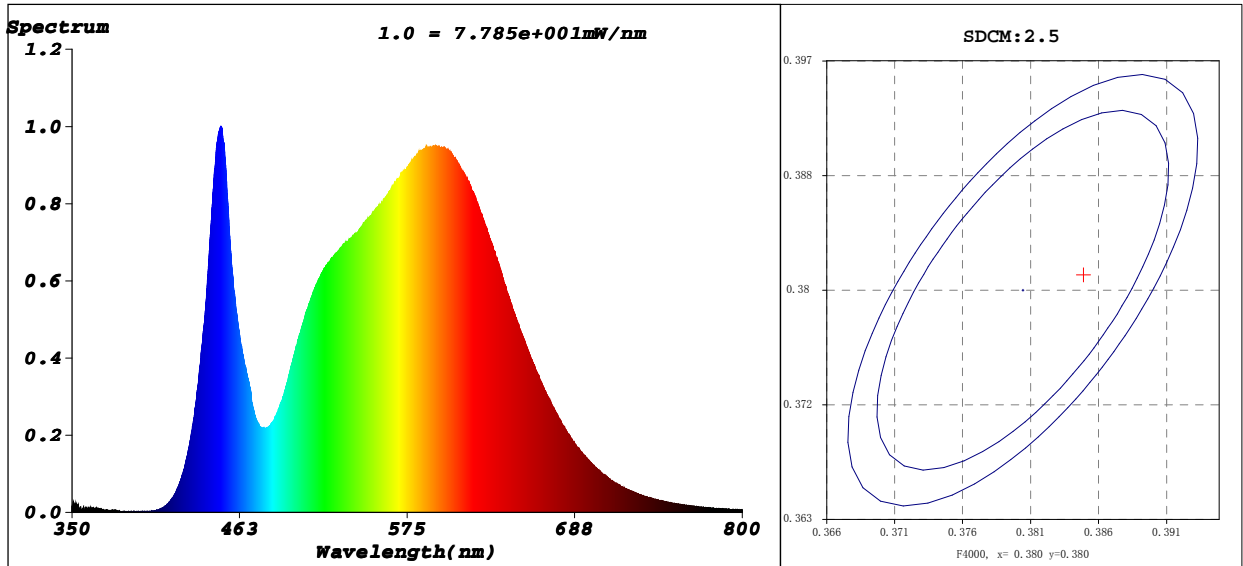

Colorimetric Parameters

Chromaticity Coordinate: $x=0.3845$ $y=0.3811/u'=0.2260$ $v'=0.5041$
 CCT=3925K(Duv=0.0009) Dominant WL:Ld =578.9nm Purity=29.8%
 Peak WL:Lp=450.1nm FWHM=22.0nm
 Render Index:Ra=81.5 Render Index:AvgR =74.5
 R1 =80 R2 =87 R3 =93 R4 =81 R5 =80 R6 =82 R7 =86
 R8 =64 R9 =4 R10=69 R11=80 R12=60 R13=81 R14=96 R15=74

Photometric & Radiometric Parameters

Flux=4253 lm Eff.:105.00 lm/W Fe=12.81 W

Electrical parameters

V=230.1 V I=0.3183 A P=40.51 W PF=0.5530 Kdisp(IEC) = 0 F=49.99 Hz
 功率因数 Kdisp(IEC)=0 频率=49.99 Hz

LEVEL:OUT WHITE:ANSI_4000K

Status: Integral T = 71 ms Ip = 50830 (78%)

Model:LLPBL60X60CM40W4000K-1 Test Mode: Accuracy Test; Sensitivity = High; Temp: ON
 Test By:DAMIN Number:LLPBL60X60CM40W4000K-1
 Temperature:25.3Deg Date:2023-07-25 16:43:42
 Manufacturer: Humidity:65.0%
 Assessor:damin Remarks:---