


Spectrum Test Report

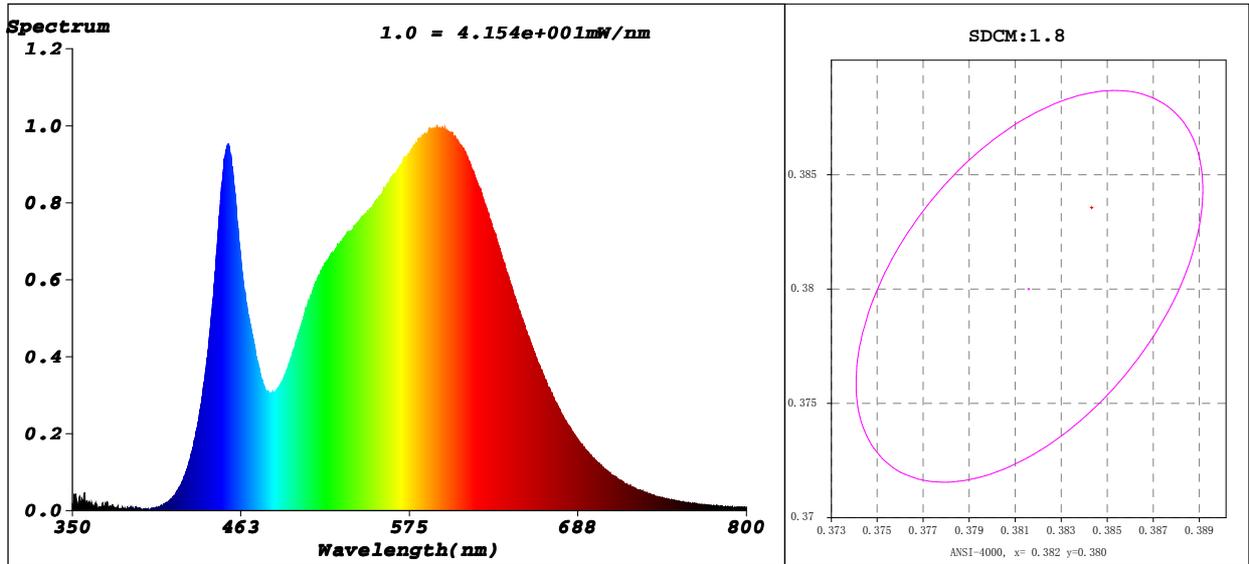

Colorimetric Parameters

Chromaticity Coordinate: $x=0.3845$ $y=0.3834/u'=0.2252$ $v'=0.5051$
 CCT=3940K(Duv=0.0019) Dominant WL:Ld =578.3nm Purity=30.5%
 Peak WL:Lp=593.4nm FWHM=146.3nm
 Render Index:Ra=82.7 Render Index:AvgR =75.8
 R1 =81 R2 =89 R3 =96 R4 =81 R5 =81 R6 =85 R7 =86
 R8 =63 R9 =6 R10=75 R11=79 R12=62 R13=83 R14=98 R15=74

Photometric & Radiometric Parameters

Flux=2364 lm Eff.:120.49 lm/W Fe=7.135 W
 Fmol(umol/s):33.492 Fluo. and blue light ratio:4.730 Fluorescent eff.:166.4

Electrical parameters

V=230.2 V I=0.1538 A P=19.62 W PF=0.5543 Kdisp(IEC) = 0 F=49.99 Hz
 功率因数 Kdisp(IEC)=0 频率=49.99 Hz
 LEVEL:OUT WHITE:ANSI_4000K

Status: Integral T=10 ms, Ip=3365 (5%)
 Model:LLUF018WIP54BOATSW 4000K-4 Number:18
 Test By:Test Mode: Fast Test; Sensitivity: 2024-06-20 16:58:02
 Temperature:25.3Deg Humidity:65.0%
 Manufacturer: Remarks:
 Assessor:damin